



THE LEAD LINED

**HOLLOW METAL
DOOR
& FRAME**

NATIONAL

CUSTOM HOLLOW METAL DOORS & FRAMES


The difference is quality.




Lead Lined Doors & Frames

National Custom Hollow Metal and DEFENDDOOR Lead Lined Doors are available in 16, 14, or 12 gauge galvanized or 16 and 14 gauge stainless steel construction with a continuous sheet of lead from 1/32" thick up to 1/8" thick, laminated to door skin and a sheet of high density polystyrene. The lead sheet extends the full width and height of the door. Lead thickness is to be equal to the shielding in the adjacent wall.

Lead Lined Doors, can be built as 5'0" x 12'0" with 1/16" lead and 5'0" x 8'0" with 1/8" lead, due to their weight and construction, doors require hardware specifically designed and manufactured for this application. The perimeter of the door has continuous 14 gauge channels reinforced and/or prepared for the specified hardware. Bottom pivots will be reinforced with tapping for attachment done in the field. NCHM and DEFENDDOOR Lead Lined Doors, with up to 3/32" thick lead, are available with Warnock Hersey 1-1/2 HR label and can be provided with view windows having a maximum of 100 square inches of visible glass.

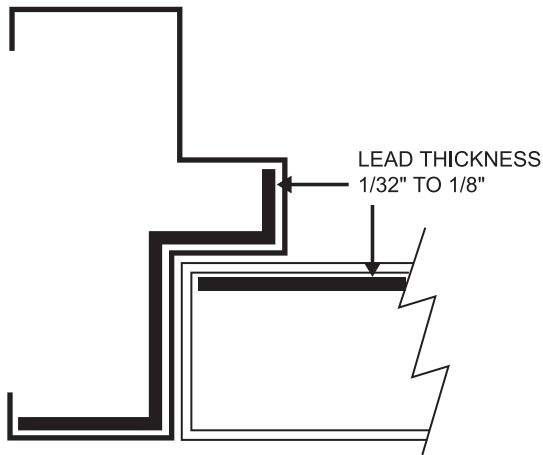

National Custom Hollow Metal and DEFENDDOOR Lead Lined Frames can be built to 10'0" x 12'0" with 1/16" lead and 10'0" x 8'0" with 1/8" lead with 16, 14, or 12 gauge galvanized or 16 and 14 gauge stainless steel construction.

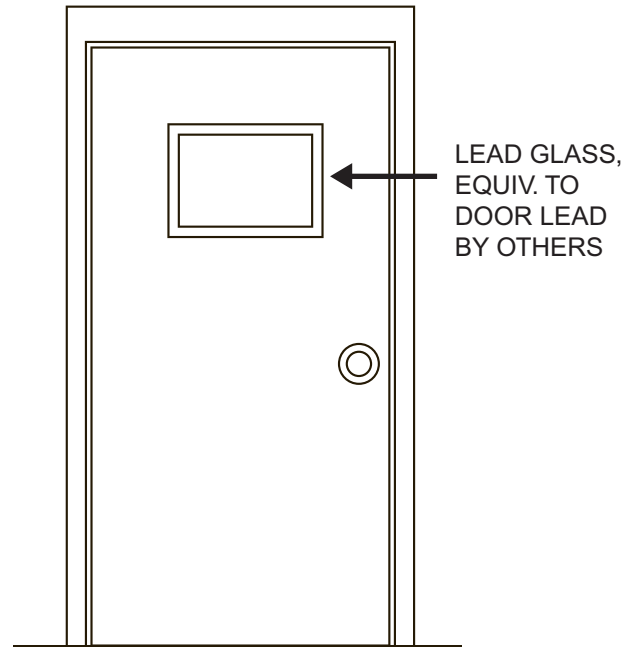

Door Hardware Preps

- > Full Mortise Hinges
- > Continuous Hinge
- > Pivots
- > Cylindrical Lock
- > Mortise Lock
- > Hospital Latch

Call or Fax your Order to:

1-800-334-3070 + Fax: 501-375-3070

P.O. Box 428 + Little Rock, AR 72203-0428

Call us today to quote your next Lead Lined Door or Frame product. Our trained staff will be glad to help you meet any of your needs or applications.

NATIONAL

CUSTOM HOLLOW METAL DOORS & FRAMES

The difference is quality.

